

Q

REV. DESCRIPTION DATE APPROVE

33

16

17

30

31

01/663144

16'

17'


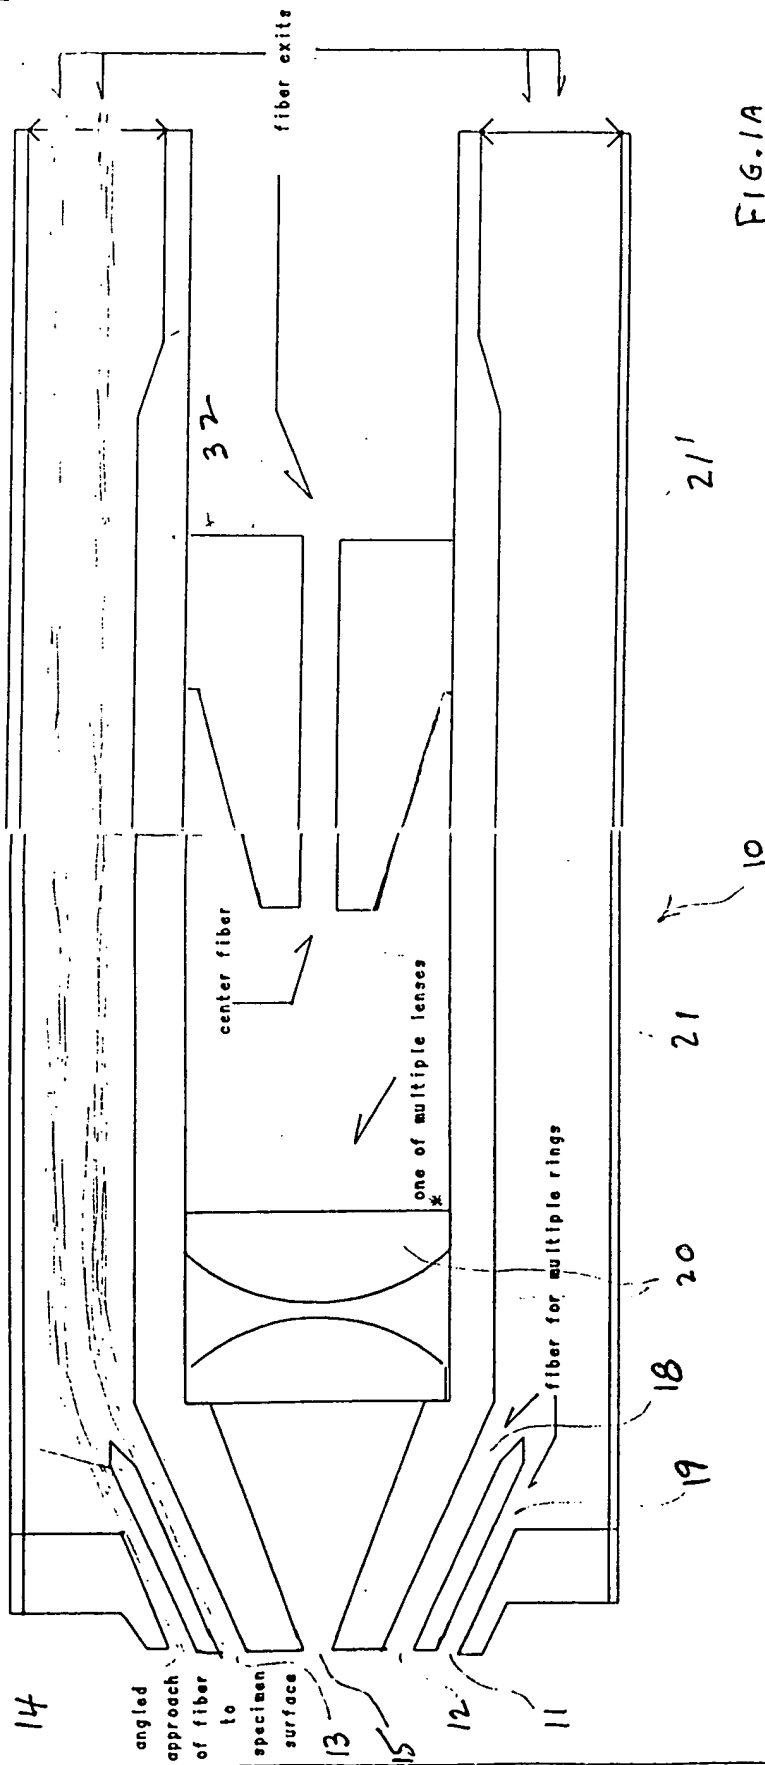


FIG. 1A

21 and 21' are adjustable in position

07/663144

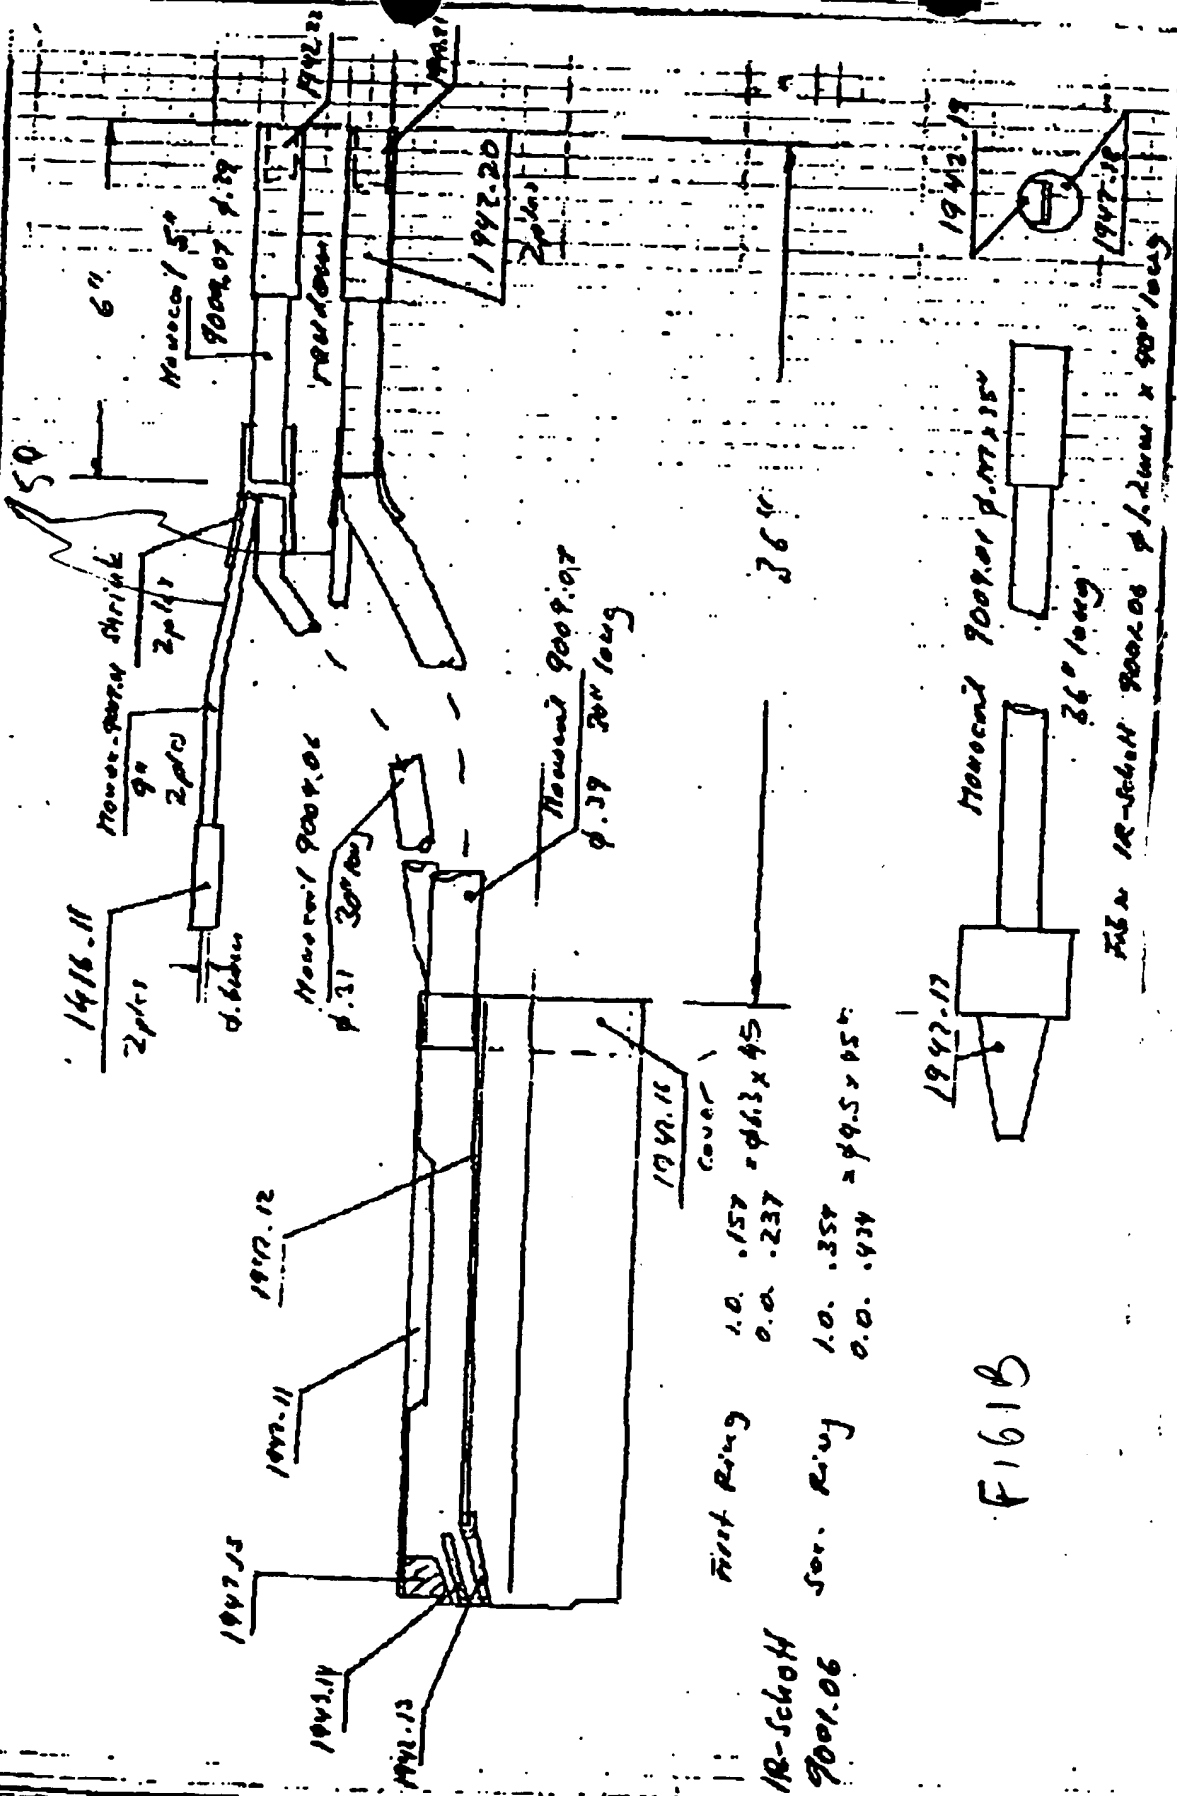

1R-Schoff
9001.06

| | | |
|------------|----------|-------|
| First Ring | 1.0 .157 | cover |
| | 0.0 .237 | |
| Sec. Ring | 1.0 .357 | |
| | 0.0 .434 | |

F161B


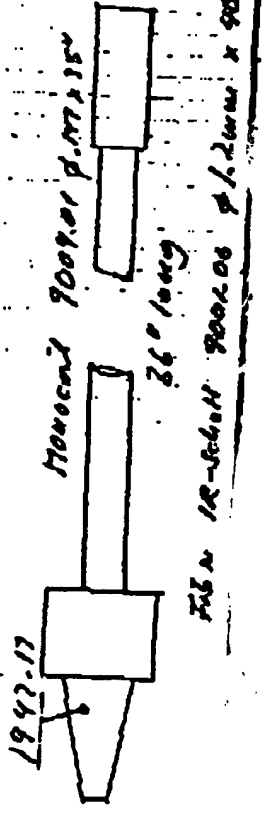


Fig. 1R-Schoff 9002.06 p. 1.2mm x 900' long

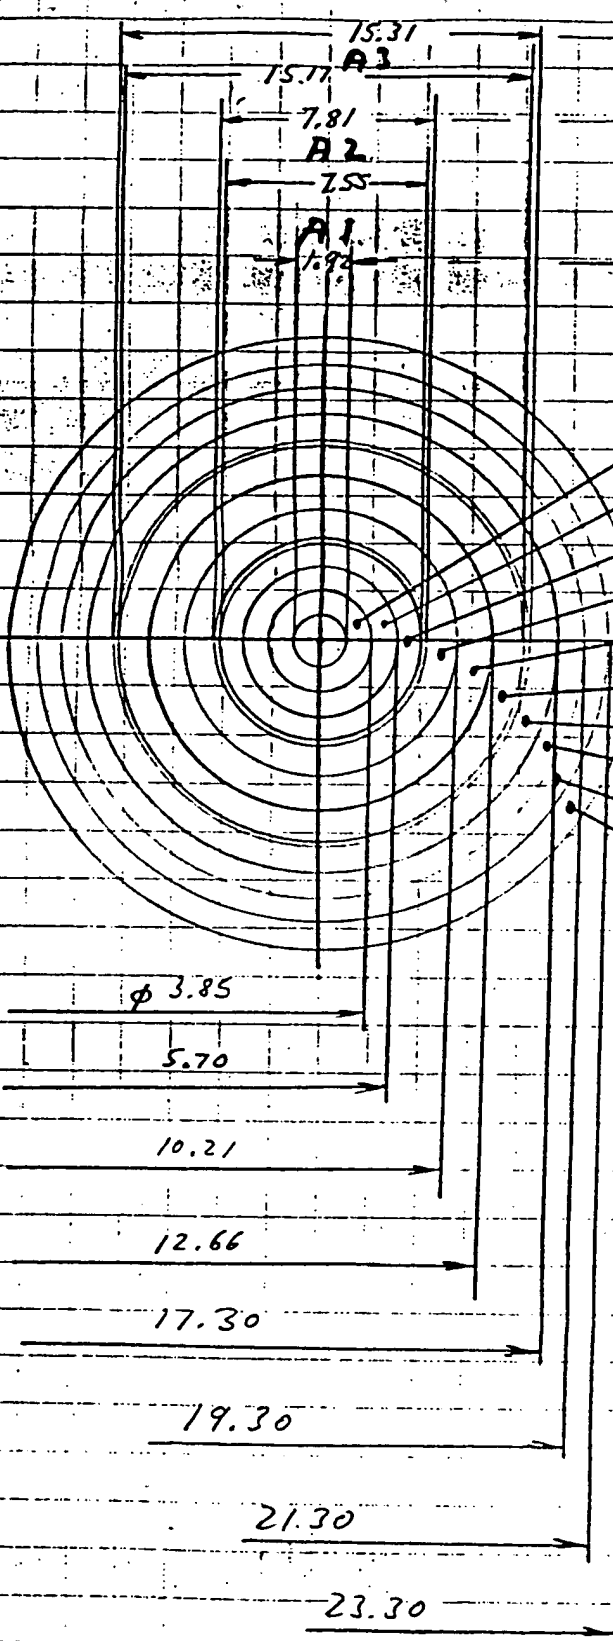

| | active % | active mm ² | Ref. Fib. % | Ref. Fib. mm ² | Spacer Fib. % | Spacer Fib. mm ² |
|----------------------|-------------|---------------------------|----------------|------------------------------|------------------|--------------------------------|
| 8.8 mm ² | 90 | 7.90 | 12 | 1.9 | | |
| 14.5 mm ² | 90 | 13 | 10 | 1.45 | | |
| 20.2 mm ² | 90 | 18.2 | 10 | 2.0 | | |
| 34 mm ² | 50 | 17 | 5 | 1.7 | | |
| 43 mm ² | 50 | 21.5 | 5 | 2.2 | | |
| 52 mm ² | 50 | 26 | 5 | 2.6 | | |
| 51.1 mm ² | 40 | 20.4 | 4 | 2.0 | | |
| 57.5 mm ² | 40 | 23 | 4 | 2.3 | | |
| 63.7 mm ² | 40 | 25.5 | 4 | 2.6 | | |
| 70 mm ² | 40 | 28 | 4 | 2.8 | | |

$$\begin{array}{r}
 200.5 \\
 20.5 \\
 \hline
 221.0 \text{ mm} \\
 + 21 \\
 \hline
 242 \text{ mm}
 \end{array}$$

FIG. 2